


DIN - 603

TORNILLO CON CUELLO CUADRADO

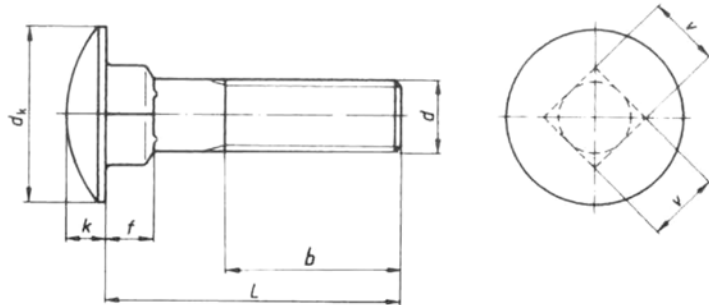

V min.	4,52	5,52	7,42	9,42	11,3	15,3
F max.	4,1	4,6	5,6	6,6	8,75	12,9
K max.	3,3	3,88	4,88	5,38	6,95	8,95
dk max.	13,55	16,55	20,65	24,65	30,65	38,8
b L≤125	16	18	22	26	30	38
b 125<L≤200	22	24	28	32	36	44

	M-5	M-6	M-8	M-10	M-12	M-16
16	*	*	*			
20	*	*	*	*		
25	*	*	*	*		
30	*	*	*	*	*	*
35	*	*	*	*	*	*
40	*	*	*	*	*	*
45	*	*	*	*	*	*
50	*	*	*	*	*	*
60	*	*	*	*	*	*
70	*	*	*	*	*	*
80	*	*	*	*	*	*
90		*	*	*	*	*
100		*	*	*	*	*
110		*	*	*	*	*
120		*	*	*	*	*
130		*	*	*	*	*
140		*	*	*	*	*
150			*	*	*	*