


DIN - 916

ESPÁRRAGO ROSCADO CON HEXÁGONO INTERIOR PUNTA CON CHAFLAN Y CONO INTERNO

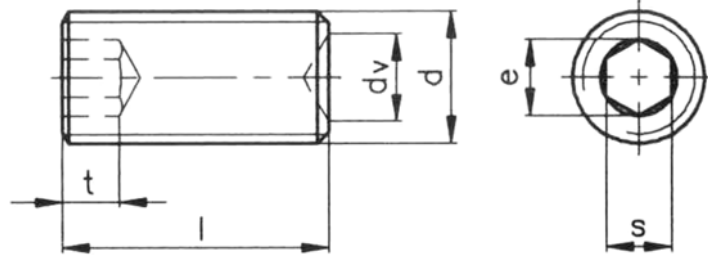

dv max.	1	1,2	1,4	2	2,5	3	5	6	8	10	14
t min	0,8	1,2	1,2	1,5	2	2	3	4	4,8	6,4	8
e	1	1,42	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
s	0,9	1,3	1,5	2	2,5	3	4	5	6	8	10

	M-2	M-2,5	M-3	M-4	M-5	M-6	M-8	M-10	M-12	M-16	M-20
3	*	*	*	*							
4	*	*	*	*	*						
5	*	*	*	*	*	*					
6	*	*	*	*	*	*	*				
8	*	*	*	*	*	*	*	*			
10	*	*	*	*	*	*	*	*	*		
12	*	*	*	*	*	*	*	*	*	*	
16	*	*	*	*	*	*	*	*	*	*	
20			*	*	*	*	*	*	*	*	*
25			*	*	*	*	*	*	*	*	*
30				*	*	*	*	*	*	*	*
35				*	*	*	*	*	*	*	*
40				*	*	*	*	*	*	*	*
45					*	*	*	*	*	*	*
50					*	*	*	*	*	*	*
60						*	*	*	*	*	*
70						*	*	*	*	*	*
80							*	*	*	*	*
90							*	*	*	*	*
100							*	*	*	*	*